



**BONN HUNGARY
ELECTRONICS**

**WIDE BAND
LCD DISPLAY
SYNTHESIZER**

BSVP11
NDS # 326

an ISO 9001 Certified Company



- **POWER LEVEL CONTROL IN 1 dB STEPS**
- **HIGH AMPLITUDE DINAMIC RANGE**
- **COMPACT SIZE**
- **NON VOLATILE MEMORY**
- **2 ROW LCD DISPLAY (FREQ. & POWER) WITH BACKLIGHT**
- **OPTIONAL DUAL CONTROL (PUSH BUTTON & RS232)**


This synthesizer is intended for use in professional applications as programmable local oscillator, where very high frequency resolution, compact size, programmable power level, dual frequency control, easy handling and modest price are important factors. Main applications are in satellite and telecommunications systems, instrumentation.

ELECTRICAL CHARACTERISTICS:

Frequency Range	700 to 2500 MHz
Frequency Resolution	100 kHz
Frequency Steps	100 kHz, 1 MHz, 10 MHz, 100 MHz
Output Power Range	-45 to +13 dB, max., 15 dB
Output Power Steps	nominal 1 dB
Output Attenuation	min. 50 dB
Internal Reference Stability	± 2 ppm (opt. ± 0.2 ppm)
SSB Phase Noise @ 1KHz	<-60 dBc/Hz typ. -65 dBc/Hz
@ 10 KHz	<-80 dBc/Hz typ. -85 dBc/Hz
@ 100 KHz	<-108 dBc/Hz typ. -110 dBc/Hz
Spurious	< - 60 dBc, typ. -65 dBc
Memory Function	yes
RF Connector	SMA-F
DC Connector	\varnothing 5.5mm DC-F
Power Supply	12-16 V / 430 mA DC W/O back light
Operating Temperature Range	0 to + 40 °C
PC Connection	RS-232

Customer specified band is also possible.

OUTLINE DIMENSIONS (mm):

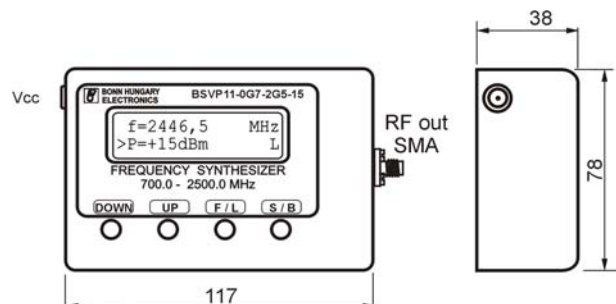

BONN Elektronik
RF Systems, Instruments and Components



Rudolf-Diesel-Str.18 · D-85521 Ottobrunn · Tel +49 (0)89/608 754-0 · Fax +49 (0)89/608 754-99
email: info@bonn-elektronik.com · home: www.bonn-elektronik.com