



Lüthi

**Elektronik –
Feinmechanik**



Coupling-Decoupling Network

C D N L-801 S 4 / Dsub9

IEC 61000-4-6

| | |
|----------------------|------------------------|
| AE Port | Dsub9 |
| EUT Port | Dsub9 |
| Leads | screened cable 4 lines |
| Max. Voltage | 100 V |
| Max. Current | 0,25 A |
| IN Port | BNC 50 Ohm |
| Frequency range | 0,15 ... 230 MHz |
| HF Power Dissipation | 4 Watt |

SCHWARZBECK MESS - ELEKTRONIK

Tel.: +49(0)6228/1001 www.schwarzbeck.de office@schwarzbeck.de

L 801 S4





CDN, Daten 2 twisted pair geschirmt, Sub-D Buchse 9-pol.



CDN Data 2 twisted pairs screened, D-sub 9 female

**CDN Impedance and K-factor
in the frequency range 150 kHz - 230 MHz
in a test setup according to IEC 61000-4-6**

CDN Type S4

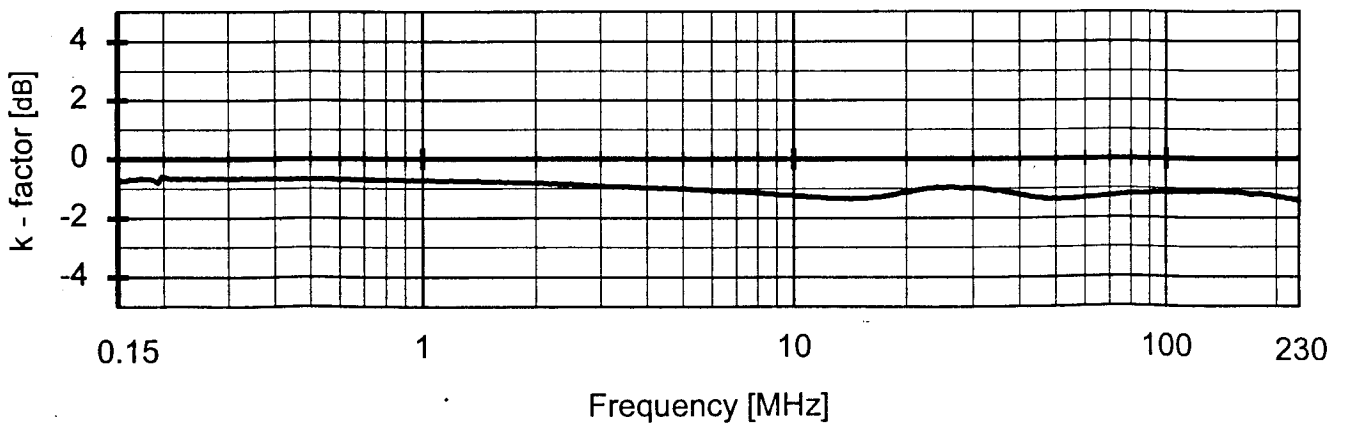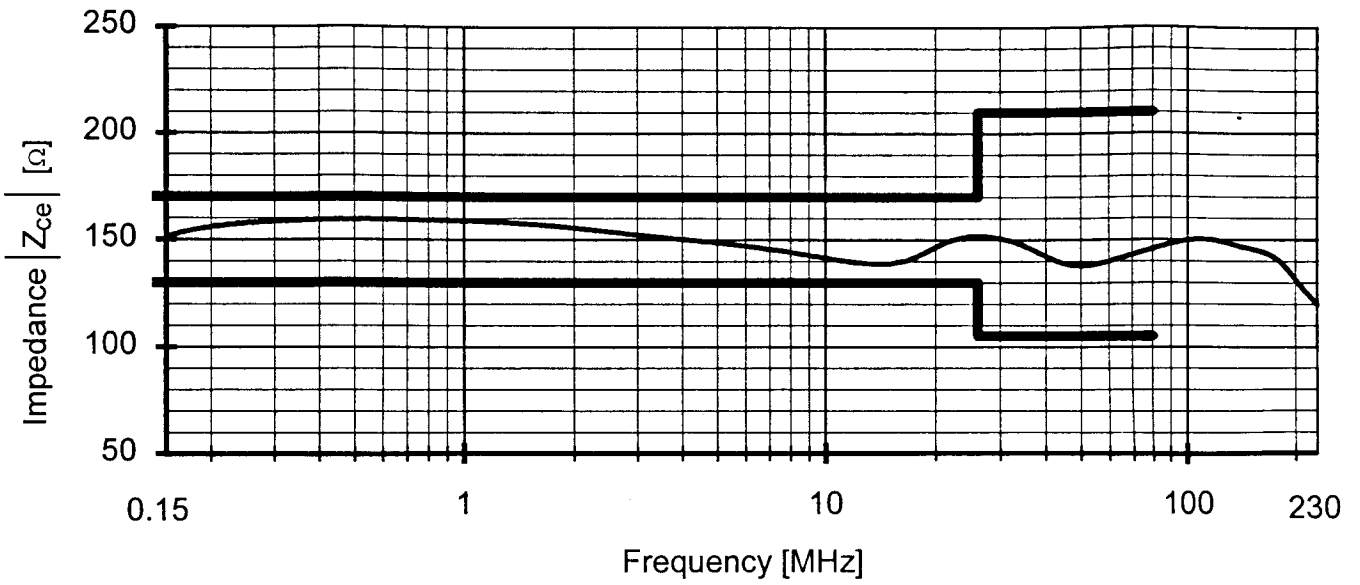

Equipment used:

Network Analyzer Typ ZVR
50 Ω to 150 Ω Adaptor
50 Ω to 150 Ω Adaptor

Inv. Nr. 4110
Inv. Nr. 4159
Inv. Nr. 4160

Location:

Reference for K-factor
Measurement Impedance
Measurement K-factor

EB15

Date and time:
2002.04.26 11:14
2002.08.16 08:55
2002.08.16 09:07