



**BONN HUNGARY
ELECTRONICS**

**LOW NOISE
AMPLIFIER**
(WAVEGUIDE IN / COAXIAL OUT)

BLSW13
NDS # 504

an ISO 9001 Certified Company



- **LOW NOISE**
- **BUILT IN BAND PASS FILTER**
- **WEATHER-PROOF HOUSING**


This S-band low noise amplifier is intended for use in modern solid state communication equipment, where high reliability microwave signal amplification, high dynamic range are important factors. Typical applications are in satellite or terrestrial telecommunication systems. This microwave LNA is constructed using Gallium Arsenide HEMT amplifier stages of high reliability. Due to the weather-proof sealing, it can be used effectively in harsh environmental conditions.

ELECTRICAL CHARACTERISTICS :

Frequency Band	2.0 to 2.3 GHz min.
RF Gain	45 dB
Gain Flatness	± 0.5 dB
Gain Stability	± 0.5 dB / day max
Input Noise Temperature (Noise Figure)	< 65 °K (< 0.87 dB) typ. < 50 °K
I/O VSWR	< 1.5
1 dB Compression	+ 10 dBm
I/O Impedance	50 ohms
Supply Voltage	+ 11 ... + 24 V DC
RF Connectors	Waveguide Input / N-female Output
Housing	water proof
Operating temperature range	0 ...+ 60 °C (optional: - 30 ...+ 70 °C)

Specifications are subject to change without notice.

OUTLINE DIMENSIONS (mm):

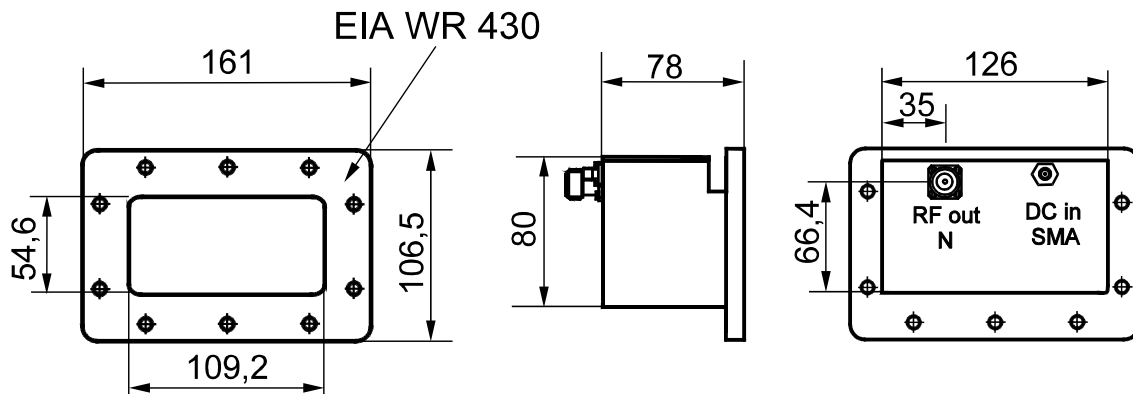

BONN Elektronik 
RF Systems, Instruments and Components

Rudolf-Diesel-Str.18 · D-85521 Ottobrunn · Tel +49 (0)89/608 754-0 · Fax +49 (0)89/608 754-99
email: info@bonn-elektronik.com · home: www.bonn-elektronik.com